



01 / PRODUCT OVERVIEW

23 mm x 115, API-T

23x115 mm API-T round

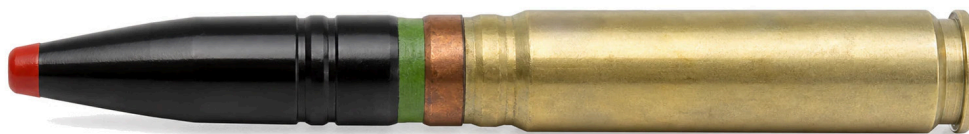


FIG 01 PRODUCT CONFIGURATION

720±10 m/s

MUZZLE VELOCITY

168±4 g

PROJECTILE MASS

23 mm

CALIBRE

321±8 g

ROUND MASS

01.1 / OVERVIEW

A 23 mm x 115 armour-piercing incendiary tracer round for aircraft guns, made up of a brass cartridge case with a percussion gun primer, a propellant charge and an armour-piercing projectile filled with incendiary and tracer composition.

TYPE
APCALIBRE
23x115 mmSTANDARD
Eastern

PROCUREMENT AND COMPLIANCE

Supply is exclusively for government and institutional end-users. Availability is subject to destination screening, a state-issued export licence and a verified End-User Certificate.



02 / TECHNICAL SPECIFICATION

TECHNICAL DATA

23 mm x 115, API-T / AMMUNITION

IDENTITY AND CONSTRUCTION

Calibre	23 mm
Projectile mass	168±4 g

BALLISTIC PERFORMANCE

Muzzle velocity	720±10 m/s
Maximum pressure of powder gases	300 MPa
Operating temperature	-30 ÷ +50 °C

DIMENSIONS, MASS AND SUPPLY

Round mass	321±8 g
------------	---------

ADDITIONAL TECHNICAL DATA

Weapon	23 mm aircraft guns GSh-23L, GSh-23LU and GSh-6-23
Tracer burning time	min 3 s