



01 / PRODUCT OVERVIEW

L110

5.56 x 45 mm NATO Tracer L110

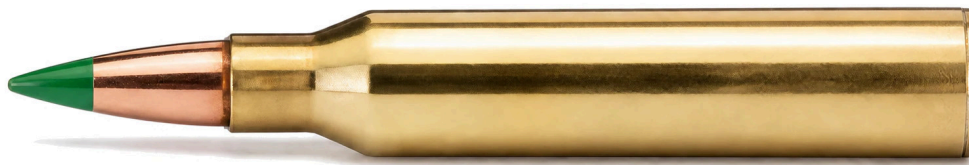


FIG 01 PRODUCT CONFIGURATION

4.1 g / 63.3 gr

BULLET MASS

**900 +/- 20 m/s at
24 m (V24)**

AVERAGE VELOCITY

12.1 g

CARTRIDGE MASS

A-735

INDEX

01.1 / OVERVIEW

STANAG 4172 tracer cartridge for 5.56 x 45 mm weapons with 1:7 in barrel twist; trace visible from 140 to 900 m.

TYPE
Tracer

CALIBRE
5.56x45 mm

STANDARD
NATO

PROCUREMENT AND COMPLIANCE

Supply is exclusively for government and institutional end-users. Availability is subject to destination screening, a state-issued export licence and a verified End-User Certificate.



TECHNICAL DATA

L110 / AMMUNITION

IDENTITY AND CONSTRUCTION

Bullet type	TRACER
Bullet mass	4.1 g / 63.3 gr
Cartridge mass	12.1 g

BALLISTIC PERFORMANCE

Average velocity	900 +/- 20 m/s at 24 m (V24)
Temperature interval	-54 to +52 deg C

DIMENSIONS, MASS AND SUPPLY

Packaging	1000 rds in M2A1 box, 15.2 kg; 800 rds linked (4 x 200), 14.1 kg
-----------	--

ADDITIONAL TECHNICAL DATA

Index	A-735
Standard	STANAG 4172
Trace	visible 140 to 900 m from muzzle of the weapon
Usage	5.56 x 45 mm weapons with 1:7 in barrel twist
Primer	small rifle, non-corrosive, non-mercuric, boxer